



Frost Panels with *CLIMAPlus* Superior Performance/
DONN FINELINE 1/8 DXFF Suspension System

LEED Credits

Recycled Content: 71%
CLIMAPlus Superior Performance for Mold/Mildew

MR				EQ		
Waste Reduction ¹	Recycled Content	Regional Materials ²	Rapidly Renewable Materials	Low-Emitting Materials	Daylight and Views	Acoustical Performance
	●	●	●	●	●	●

Features and Benefits


- Fine-textured cast product with durable surface that resists scrapes commonly caused by accessing the ceiling plenum.
- Integral color masks nicks and scratches.
- Nearly two times more impact-resistant than typical fine-textured ceiling panels (ASTM C367).
- *CLIMAPlus* 30-year lifetime system warranty to withstand conditions up to 104 °F (40 °C)/95% relative humidity without visible sag when used with a *DONN*® brand suspension system.

Applications

- Boutiques
- Schools
- Conference and lobby areas
- Executive offices
- Open-plan offices

Substrate

- Cast mineral fiber

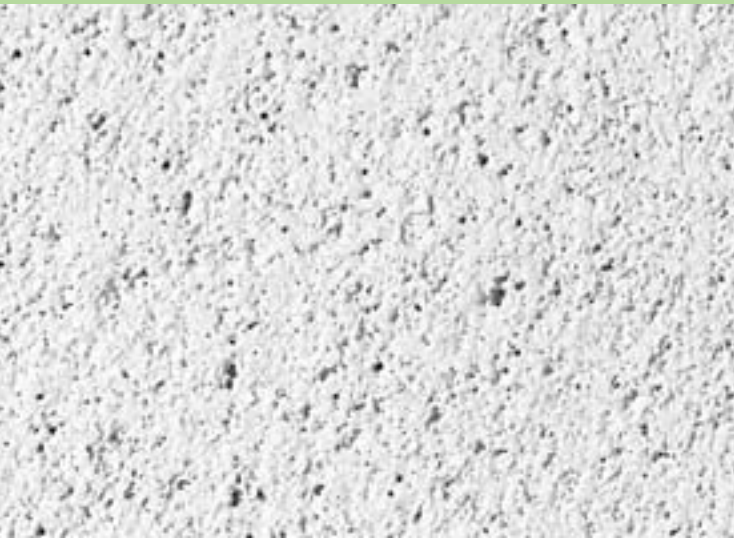


Fine-textured panel


Call 888.874.2450 for color samples

See individual items for color availability.

Standard Colors

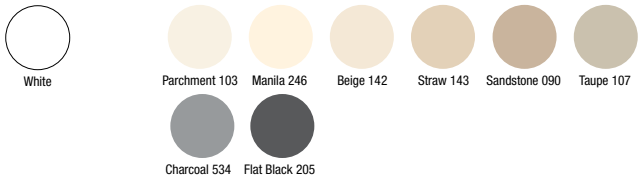

Advantage Colors

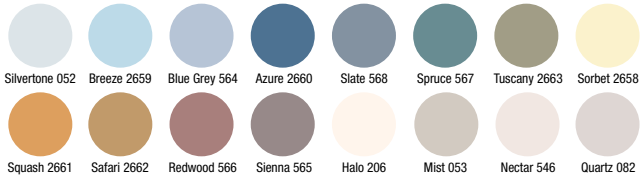






































30

Year System Warranty
 – No visible sag
 – Mold/mildew protection

Frost CLIMAPlus Panels

Frost CLIMAPlus High LR

UL Classified													
Edge	Panel Size	Class	Item No.	NRC	CAC Min. ³	LR ⁴	Color ⁵	Grid Options	VOC Emissions	Anti-Mold & Mildew	Abuse-Resistant	Recycled Content ⁶	Panel Cost
													
SLB 	2'x2' x3/4" Paper-Back	Class A	414	.70 	38	.83	White Standard Advantage	A	Zero			71%	\$\$
FL 	2'x2' x3/4" Paper-Back	Class A	418	.70 	38/40 	.83	White Standard Advantage	B, C, D	Zero			71%	\$\$
FLB 	2'x2' x3/4" Paper-Back	Class A	419	.70 	38/40 	.83	White Standard Advantage	B, C, D	Zero			71%	\$\$
SLB 	2'x2' x3/4" Paper-Back	Class A	490	.70 	35	.88	White	A	Zero			71%	\$\$
FLB 	2'x2' x3/4" Paper-Back	Class A	491	.70 	35	.88	White	B, C, D	Zero			71%	\$\$
Legend <div> Zero Emissions (VOC Class) Classified as zero-emitting per standards established by the Collaborative for High-Performance Schools (CHPS), following California Specification 01350 testing methods.</div> <div> CLIMAPlus Superior Performance⁷ Contains a broad-spectrum antimicrobial treatment on the face and back of the panel that provides guaranteed resistance against the growth of mold/mildew.</div>													
A DX®/DXL™	B CENTRICITEE™ DXT	C FINELINE® DXF	D FINELINE® 1/8 DXFF										
													

Physical Data/ Footnotes

Product literature
 Data sheet: SC1968

ASTM E1264 classification
 Type III, Form 4, Pattern E

ASTM E84 surface burning characteristics
 Class A
 Flame spread: 25
 Smoke developed: 50

Weight
 1.65 lb./sq. ft.

Thermal resistance
 R-1.7 (Class A)

Maximum backloading
 See Warranty for details.

Maintenance
 Can be cleaned easily with a soft brush or vacuum.

Texture
 The manufacturing process for cast ceiling panels creates natural, subtle texture variations, which is a distinguishing feature of these products. Because of potential variances between production dates, we recommend ordering and installing color cast products by production lot number.

Footnotes

1. Applies when USG acoustical ceilings recycling program is utilized.
2. Dependent on location; see Sustainability selector.
3. Item Nos. 418 and 419 achieve 40 CAC when installed with FINELINE or FINELINE 1/8 suspension system.
4. LR values are shown as averages.
5. See Colors selector for more information.
6. For details, see Sustainability selector.
7. Panel face and back surfaces treated with a patented, broad-spectrum antimicrobial standard formulation that inhibits and

retards the growth of mold/mildew. For details, see *Ceiling Systems Warranties and Limitations* (SC2102) and *CLIMAPlus Ceilings Certification of Performance* (SC2451).